

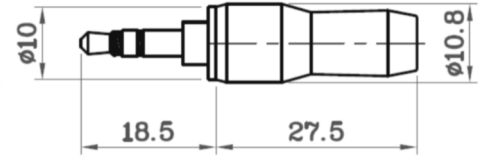


Naked Cable

Technical Specifications & Data

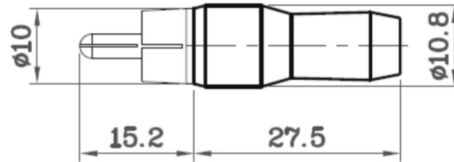

AUDIOJACK0.5MCI (RCA to 3.5mm Jack Cable)

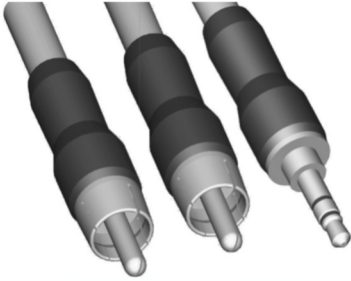

Short Description

Naked Cable's RCA to 3.5mm Stereo Jack 'Audio' line-level connecting cable is manufactured using high-quality materials in an ISO approved factory. This cable features premium grade oxygen free copper (C10100), a heavier gauge conductors along with high levels of shielding for noise rejection. A PVC dielectric made to CM CL3 ideal for Custom Installation and an outer insulation finished in a room friendly 'off white'.

Details

- 1 pair 22 gauge/0.64mm diameter (0.33mm²)
- Flexible polyethylene inner insulation
- Anti-static PVC outer insulation
- AL Mylar and tin copper braided shielding
- Filling material used to maintain consistent cable geometry
- RCA/3.5mm Plug diameter 10.8mm
- Gold-plated and soldered connectors
- Finished in interior friendly 'warm grey'

Conductor Composition / Insulation (Dielectric)

Design: 'Y' cable format, factory soldered gold plated RCA & 3.5mm connectors
Conductor: 22-gauge/0.64mm Premium grade C10100 OFC
Insulator (s): PVC insulation material, outer diameter 5.8mm
Shielding: 2 Levels of shielding with tinned copper and 90% braiding

Electrical Detail

Impedance:	38 ohms	Capacitance:	107.4 p/m
Conductor:	2 x	Shielding:	2 Levels
Compliance:	Made to CM CL3	Additional:	Overprint Text

Product Detail

Size:	Connector Ø 10.8mm Cable Ø 5.8mm	Colour:	Pantone Warm Grey 2
Length	(Connector total) 42.7mm/46.0mm	Braid Colour:	N/A
Carton:	12-24 Units	UL Rating:	N/A



Please note: Naked Cable makes every effort to ensure that these details are correct, but from time to time may change the final specification without notice. As such, these specifications are supplied 'as is' with no warranties expressed or implied.