



MC252

Power Amplifier


Promotional Highlights

With 250 watts per channel at 0.005% maximum distortion across the entire spectrum, the MC252 delivers lots of clean power. The two channels of the MC252 can also be combined into a single channel that delivers 500 watts into 1, 2, 4, 8 or 16 ohms.

McIntosh's exclusive output autoformers ensure that the amplifier will always deliver full power, without stress, to any type of loudspeaker. Whether your speakers are 2, 4, or 8 ohms, McIntosh autoformers ensure that you'll always get all of the power you paid for.

Performance Features:

- Balanced and Unbalanced Inputs
- Patented Sentry Monitor with Thermal Protection
- Illuminated Power Meters
- Glass Front Panel with Solid-State Fiber-Optic Illumination
- Glass Front Panel and Stainless Steel Chassis with Super Mirror Polished Finish

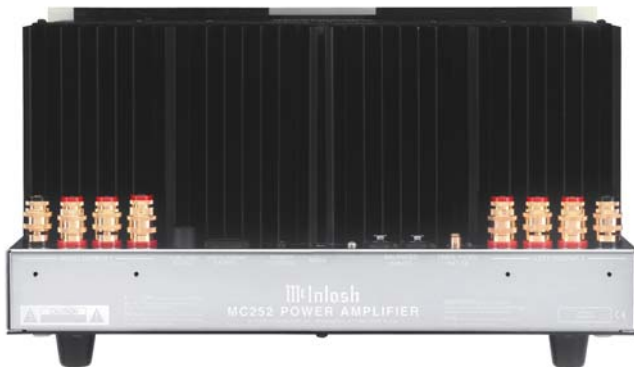

Performance Specifications:

Power Output Stereo: 250 Watts into a 2, 4, or 8 ohm load.

Power Output Mono: 500 Watts into a 1, 2, 4, 8 or 16 Ohm load.

Output Load Impedance: 2, 4, or 8 ohms (Stereo); 1, 2, 4, 8 or 16 ohms (Mono)

Rated Power Band: 20Hz to 20kHz

Dynamic Headroom: 2.0dB

Frequency Response: +0, -0.25dB from 20Hz to 20kHz; +0, -3.0dB from 10Hz to 100kHz

Power Requirements: 120V, 50/60Hz, 6.6 A

Overall Dimensions (h x w x d including knobs and connectors): 8-13/16" (22.38cm) x 17-1/2" (44.5cm) x 14-13/16 (37.62cm)

Weight: 94-1/2 lbs. (42.87kg) net, 108-1/2 lbs (49.22kg) boxed.

For more information on the MC252 Power Amplifier and other McIntosh equipment contact your nearest Authorized McIntosh Dealer!

